

IMPLEMENTATION OF ENERGY EFFICIENT PROTOCOL FOR WIRELESS SENSOR NETWORK.

Thesis submitted in partial fulfillment of the requirements for the degree of

Bachelor of Technology in Computer Science and Engineering

By:

Dibya Ranjan sethi (10606005)



Department of Computer Science and Engineering

National Institute of Technology

Rourkela

IMPLEMENTATION OF ENERGY EFFICIENT PROTOCOL FOR WIRELESS SENSOR NETWORK.

Thesis submitted in partial fulfillment of the requirements for the degree of

Bachelor of Technology in Computer Science and Engineering

By:

Dibya Ranjan sethi (10606005)

Under guidance of

Prof. Ashok Kumar Turuk



Department of Computer Science and Engineering

National Institute of Technology

Rourkela



Engineering

Department of Computer Science and

National Institute of Technology Rourkela
Rourkela-769 008, Orissa, India.

CERTIFICATE

This is to certify that the work in this Thesis Report entitled “IMPLEMENTATION OF ENERGY EFFICIENT PROTOCOL FOR WIRELESS SENSOR NETWORK” submitted by Dibya ranjan sethi, has been carried out under my supervision and guidance, in partial fulfillment of the requirements for the degree of Bachelor of Technology in computer science during session 2009-2010 in the Department of computer science and engineering, National Institute of Technology, Rourkela.

This work is basically on own implementation of a proposed protocol reported in the literature by Ram Ramanathan, Regina Rosales-Hain.

Date:
Place: NIT Rourkela

Prof. Ashok Kumar Turuk

Department of computer science and Engineering

ACKNOWLEDGEMENT

With deep regards and profound respect, I avail this opportunity to express my deep sense of gratitude and indebtedness to Prof. Ashok Kumar Turuk, Computer science and Engineering Department, NIT Rourkela, for his inspiring guidance, constructive criticism and valuable suggestion throughout in this research work. It would have not been possible for me to bring out this thesis without his help and constant encouragement.

I also thankful to Computer Science & Engineering Department faculty, Prof. S.K. Jena, Prof B Majhi our hod ,Prof pankaj kumar sa and others for their valuable suggestions for improving my B-tech thesis.

Dibya Ranjan sethi

Roll no: 10606005

CONTENTS		Page no
LIST OF FIGURES		
ABSTRACT		
CHAPTER:1		
1.	INTRODUCTION	9
1.1	Introduction	10
1.2	Wireless communication	11
1.3	Characteristics of Ad-hoc and Sensor network	12
1.4	Challenges in Ad-hoc and Sensor Network	15
1.5	Application of Wireless Sensor Network	18
1.6	Motivation	18
1.7	Objective	18
1.6	Thesis Outline	18
CHAPTER:2		
2.	INTRODUCTION TO TOPOLOGY CONTROL	19
2.1	Introduction	20
2.2	Topology control	20
2.3	Classification	20
	a. Location based topology controls	21
	b. Direction based topology controls	23
	c. Location free topology controls	24
2.4	Layer Concept	24
	a. Routing layer	24
	b. Topology control layer	24
	c. MAC layer	24
CHAPTER:3		
3.	LITRETURE OVERVIEW	25
3.1	Introduction	26
3.2	Location based topology control	26
	a. LMST protocol	26
3.3	Direction based topology controls	27
	a. CBTC protocol	27
3.4	Location free topology controls.	27
	a. XTC protocol	27
CHAPTER:4		
4.	Algorithm and implementation	29

	4.1	Algorithm	30
	4.2	Parameter description	32
	4.3	Algorithm analysis	32
	4.4	Implementation	33
	4.5	Simulation result	35
	4.6	Result analysis	35
CHAPTER:5			36
		Conclusion	36
REFERENCE:			37

List of Figures:

1.1 Example of wireless sensor network.....10

ABSTRACT

A multi-hop wire-less network is composed of large number of nodes and consecutive links between them so that when a packet is transmitted from one node to another it goes through several path. Wireless sensor network normally consists of large number of distributed nodes that organizes them into a multi-hop wireless network. In wireless sensor network one of the main problems is related to energy issue because every node is operated by battery. To have large network life time all nodes need to minimize their energy consumption. Node is composed of small battery so that the energy associated with this node is very less. So replacing and refilling of battery is not possible which is very costly. Hence some techniques are applied through which the energy associated with each node can be conserved. Energy conservation can be done by controlling the transmission power of each node. In this thesis we have tried to implement a protocol in the literature and the performance of the protocol in sensor network.

CHAPTER: 1

INTRODUCTION

1.1. Introduction:

The term "wireless" has become a generic and all-encompassing word used to describe communications in which electromagnetic waves to carry a signal over part or the entire communication path. Wireless technology can able to reach virtually every location on the surface of the earth. Due to tremendous success of wireless voice and messaging services, it is hardly surprising that wireless communication is beginning to be applied to the domain of personal and business computing. [1].Ad- hoc and Sensor Networks are one of the parts of the wireless communication.

In ad-hoc network each and every nodes are allow to communicate with each other without any fixed infrastructure. This is actually one of the features that differentiate between ad-hoc and other wireless technology like cellular networks and wireless LAN which actually required infrastructure based communication like through some base station. [2].

Wireless sensor network are one of the category belongs to ad-hoc networks. Sensor network are also composed of nodes. Here actually the node has a specific name that is "Sensor" because these nodes are equipped with smart sensors [2]. A sensor node is a device that converts a sensed characteristic like temperature, vibrations, pressure into a form recognize by the users. Wireless sensor networks nodes are less mobile than ad-hoc networks. So mobility in case of ad-hoc is more. In wireless sensor network data are requested depending upon certain physical quantity. So wireless sensor network is data centric. A sensor consists of a transducer, an embedded processor, small memory unit and a wireless transceiver and all these devices run on the power supplied by an attached battery [1].

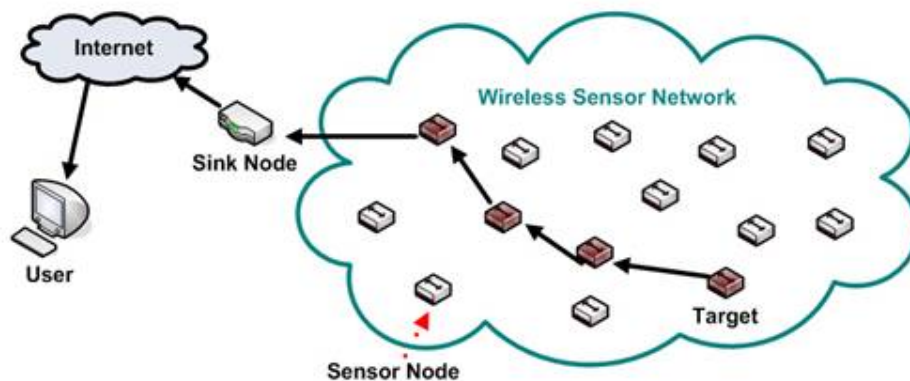


Fig: 1.1 [<http://monet.postech.ac.kr/research.html>]

CHAPTER:1

1.2. Wireless Communication:

Now in recent scenario the growth of wireless communication is vast. Because the wireless technology can be applied in any kind of situation it has a capability of reaching in any part of the earth surface. Now considering the recent market scenario in which there are a lot of wireless products are available. There are so many wireless network are there some are infrastructure based and some are infrastructure less. Ad-hoc and wireless sensor network, cellular network are some example of wireless network

1.3. Characteristic of Ad-hoc and Sensor Network:

Ad-hoc:

- **Infrastructure less:**

In ad-hoc network each and every node communicate with each other without any fixed infrastructure's communication overhead will be less. Ad-hoc is infrastructure less network.

- **Mobility:**

Mobility of nodes in ad-hoc networks more. The nodes are able to organize themselves in such a manner by exploring the area without the presence of infrastructure they can communicate with each other [3].

- **Multi-Hoping:**

Ad-hoc Networks composed of several nodes and they are communicating with each other to describe several paths to several node. Here actually the packet traverses from one node to another node to reach the destination. Due to this Multi-hop features energy associated with each node can be conserved [3].

- **Openness:**

Ad-hoc network access information and services without geographic position.

- **Adaptability:**

Can freely adaptable to any situation and dynamically self-organize into arbitrary and temporary network topologies.

- **Heterogeneous Network:**

Ad-hoc network composed of heterogeneous devices like laptop, walkie-talkies etc. The different type of devices are able to communicate with each other [2].

Wireless sensor network:

- **Infrastructure less:**

In wireless sensor network every node that is equipped with smart sensor which are communicate with each other without any fixed infrastructure So communication overhead will be less.

- **Mobility:**

Mobility of nodes in wireless sensor networks is less. Due to this kind of feature they are used in event tracking purposes like motion detection of video frames etc [2].

- **Multi-Hopping:**

Wireless sensor Networks composed of several nodes and they are communicating with each other and describe several paths to several node. Here actually the packet traverses from one node to another node to reach the destination through several paths. Due to this Multi-hop features energy associated with each node can be conserved [4].

- **Openness:**

Wireless sensor network access information and services regardless of Geographic position.

- **Network size:**

In wireless sensor network the node are scattered in large geographical area. And the number of node in Wireless sensor network network is more that is network size is more [2].

- **Homogeneous Network:**

A Wireless sensor network composed of homogeneous devices that is node has same features [2].

- **Data centric:**

In wireless sensor network data is requested depending upon certain physical quantity so wireless sensor network is data centric [1].

- **Addressing scheme:**

In sensor networks addresses contain attribute-value pair .This pair of value specifies certain physical parameters to be sensed [1].

- **Location Awareness:**

Every node should know their position relative to other node by knowing their actual location. Data are collected depending upon the location [1].

- **Reliable transmission of Data:**

To have a proper request-response model the node should request to a proper node .This node should process the request efficiently and reply as soon as possible. So that the mechanism should be reliable.

- **Fault tolerant:**

In wireless sensors, if one node fails then it does not affect the network operation because there are other adjacent nodes collecting similar data. The accuracy of data collected is reduced.

1.4 Challenges in Wireless Sensor Network:

Challenges in wireless sensor network arise in implementation of several services. There are so many controllable and uncontrollable parameter [4] by which the implementation of wireless sensor network affected such as.

- **Energy conservation:**

In wireless sensor network every node is equipped with sensor and the sensor devices are in working condition depending upon the power supplied by attached battery. To have better performance the network should operated for large time. As we know that the sensor node has small size due this small size the battery has low capacity and the available energy is very less. And in that situation the refilling or replacing of battery is impossible. It is a costly attempt. In order to avoid this problem some more energy efficient protocol are design so that the sensor node communicate efficiently by increasing both throughput and network capacity.

- **Operation in antagonistic environment:**

Sensor network can be operating in antagonistic environmental condition. So design issues of sensor node are carefully considered. Protocol for the sensor network should be robust one. It silent about any fault occurs in system.

- **Communication quality:**

Sensor network have very low quality communication depending upon different situation like when it operated in some unpleasant environment then communication quality is very poor. It is environment specific.

- **Availability of resources:**

When the resources required by sensor network are unavailable then the sensor networks try hard to provide the desired QoS.

- **Data processing :**

Data collected by many sensors may contain redundant data. So data aggregation required in network processing so that redundant data can't be transmitted more number of time. It will help to conserve some amount of energy for further transmission.

- **Scalability :**

Wireless sensor node are composed of large number of sensor node and many more nodes can be added in design stage [2].

- **Commercialization :**

In recent scenario the production of sensor node started by many electronics based company. But commercialization very poor especially in case of sensor network. Profit issue is very less [2].

- **Application specific :**

Sensor network changes with change in application. For different type of application we have to design different sensor network [1].

- **Node Id:**

Every node in the sensor network doesn't have different Id. The overhead for Id maintenance is more .In sensor network data is more important than knowing the Id [1].

Traditional routing protocol for Ad- hoc network are not suitable for Wireless sensor network And the reason are given below [1]. :

- **Data centric:**

Data is requested based upon some attributes.

- **Node Id:**

In wireless sensor network every node has same Id but in other network they are different.

- **Data redundancy:**

In wireless sensor network every adjacent node may have similar data. Data aggregation required before sending the data. It minimizes the communication overhead.

- **Application specific:**

Wireless sensor network is different for different application.

1.5 Applications in Wireless Sensor Network:

Intrusion Detection:

Due to presence of less mobility and stationary property of wireless sensor network can be used to track object event. It can be used for security purposes that are for surveillance purposes. Generally high resolution camera is equipped with sensors that can be used to form a network that monitor a restricted area access. If any outsider enter into this region without any proper authentication then some sort of signaling event occur it may be an alarm message quickly propagate to a handling authority [2].

Avalanche prediction:

Movement of large snow masses can be predicted by device equipped with sensor.GPS one of the detecting devices use for this purposes [2].

Environment Observation and Forecasting System:

The Environment Observation and Forecasting System (EOFS) is a distributed system that spans large geographic areas and monitors, models and forecasts physical processes such as environmental pollution, flooding, among others. It consists of three components: sensor stations, a distribution network, and a centralized processing farm [1].

1.6 Motivation:

Energy efficient techniques play a significant role in saving the energy. One of the techniques is the topology control mechanism. There are many existing Topology control protocols, each one is having its own advantages as well as disadvantages. After looking through this existing protocol, we decided to implement the protocol [4] which reduces the total energy consumption in the network and thus maximize the life time of the network.

1.7 Objective

To study and implement the energy efficient protocol for wireless sensor network.

THESIS OUTLINE:

Thesis is organized as follows. Chapter 2 gives a brief introduction to various topology control mechanism used for energy conservation. Chapter 3 describes the related work reported in the literature. Chapter 4 describes the algorithm and their implementation. . Chapter 5 includes conclusion.

CHAPTER: 2

INTRODUCTION TO TOPOLOGY CONTROL

2.1 Introduction to Topology controls:

Topology:

The topology of a multi-hop wireless network is a collection links by which various nodes in the network communicate with each other. It is just like a structure of a network. This topology is used by various mechanisms to select path in a network to send traffic so that the transmission of data from source to destination can be done efficiently. Topology affected by various factors like transmit power, antenna direction that can be controlled by proper implementation but there some factor like mobility, noise can't be controlled [4].

2.2 Topology Control:

Topology control is the mechanism by which nodes are arrange in such a way based upon their transmission range to increase network capacity and reduce node energy consumption [2].

So main goal of Topology control are

- Maximize network capacity
- Minimize Energy consumption

2.3 Classification:

Classification based on critical transmission range it broadly divided into two categories [2]:

- Homogeneous critical transmission range
- Heterogeneous critical transmission range

Homogeneous critical transmission range:

- Every node in the sensor network uses the same transmitting range.

Heterogeneous critical transmission range:

- Every node in the sensor network uses different transmitting range.

Topology control can be classified according to the critical transmitting range [2]:

- Homogeneous

Depending upon type of data available during computation of topology Non homogeneous topology control classified as:

- Non Homogeneous
 - a. Location based Topology control
 - i. Range assignment and variant
 - ii. Energy efficient communication
 - b. Direction based Topology control
 - c. Location free Topology control

a. Location based topology control:

Location based approach can be applied when the node location are known to compute the corresponding topology. This topology control scheme can be applied to both centralized and distributed network. In case of centralize schemes the information about node location is used by centralized authority to calculate set of transmitting range. And in case of distributed network information is transformed between various nodes to find out the optimal transmission range. In sensor network the nodes are equipped with low power GPS receiver to find out the appropriate position. As it is a new hardware attached to node it increases the cost factor which is a disadvantage in this scheme. By this way the cost factor increases[2]. Let u and v are two nodes having coordinates (x_1, y_1) and (x_2, y_2)

$$D(u, v) = ((x_1 - x_2)^2 + (y_1 - y_2)^2)^{1/2}$$

D be the Euclidian distance between two nodes u and v . Transmission power P_{uv} can be calculated as:

$$P_{uv} = (D(u, v))^\beta * c$$

Where

β = Distance power gradient
 C = path loss component

For free propagation model value of $\beta=2$.

CHAPTER:2

Free propagation model [2]:

In this model the path between the sender and the receiver is clear and unobstructed. The value of received power can be expressed by the following formula:

$$P_r(d) = P_t * G_t * G_r * \lambda^2 / ((4\pi)^2 * d^2 * L)$$

Where

λ = Wavelength in meters.

L= System loss factor.

$p_r(d)$ = power of the radio signal received by the node located at distance d from the transmitter.

G_t =Transmitter antenna gain.

G_r =Receiver antenna gain.

In this above parameter λ , L, G_t , G_r are all constants and the above formula can be replaced by

$$P_r(d) = P_t^2 / (d^2) * C$$

Where C=Constants depends upon the Characteristic of transceiver.

There are two schemes those are used this location based topology control:

Range assignment schemes:

Range assignment schemes is one of the location based topology control schemes that is used to decide the power level assignments that generate a connected communication graph and also minimize the energy consumption.

RA problem [2]:

Let N be a set of nodes in the n- dimensional space, with $n=1, 2, 3$. The range assignment function R for which corresponding communication network is strongly connected and Cost associated with this R can be expressed as:

$$\text{Cost}(R) = \sum_{u \in N} (R(u))^\beta$$

Cost is minimum over all connecting range assignment function, where β is the distance power gradient.

Energy – efficient communication Scheme [2]:

Energy – efficient scheme based on either the end to end communication scheme between various node or it depends upon communication to all node simultaneously. The first scheme known as unicast schemes and the later one is known as broadcast schemes.

Energy – Efficient unicast:

When the entire node transmits at maximum power a communication graph is created known as maxpower graph denoted by $G(N, E)$. The power cost between any two node is defined as the sum of the power cost of the single edges.

$$PCost(P_{uv}) = \sum (D(u, v))^\beta$$

Where

PCost=effective power cost of summation of power cost of single edges.

$D(u, v)$ =Euclidian distance between two nodes u and v.

β = Distance power gradient

The minimum-power path between nodes can be found out by above formulation and if the minimum-power path is not unique then we can take any path as the minimum power path.

Energy – Efficient Broadcast:

Here the main goal is to find the sparser graph of the broadcast graph broadcasting is more energy efficient. The main cause of using sparser graph to solve the problem that occurs when many nodes in a neighbourhood try to relay the broadcast message at the same time, resulting in serious redundancy, collision and bandwidth contention

b. Direction based topology control:

This topology control schemes depend upon the ability of node to find the relative direction of their neighbours. It is actually less accurate information than location. If the direction is given then we can find out the location. IEEE antenna and propagation community proposed various mechanisms for estimation of direction in which the node transmit. This problem is known as Angle - of- arrival problem. This can be solved by

equipping nodes with one directional antenna. Advantage of using Angle-of-arrival technique rather than location based techniques is that it can be use in case of indoors application[2].

c. Location free topology control:

Location or direction information nothing is given, here the node should explore knowledge about their neighbour by some message passing schemes. So that each and every node should know some minimal amount of information about their neighbour it

The information may be node id, location and order them according to certain criteria. Every node requires some minimum amount of information to build network topology it may be number of node or node id. If the node not able to find out information about the neighbour it is very difficult to built topology [2].

2.3 Layer concepts:

a. Routing Layer:

When one node sends some message to another node then the route discovery and maintenance part is done by the routing layer. This work is done by the routing protocol present in routing layer. Firstly the routing protocol checks whether the route is already known or not. If not then it starts the routes discovery phase. This layer is responsible for sending packets from sender to destination through intermediates node. When no routes found the communication is delayed[2].

b. Topology control Layer:

Topology control layer presents in between the routing layer and MAC layer. The main work of topology control protocol to create and maintain the list of immediate neighbour node. When some node fails or some modification is done to the list then this protocol trigger a route update phase .This modification is mainly done by many leave and join operation of node in the neighbour list. To minimize delay without waiting for routing layer the topology control layer triggered route update phases that the response time became faster leading to reduce packet loss rate[2].

c. MAC layer:

This layer is responsible for regulating access to shared channel, wireless. The main issue associated with this layer is to reduce the conflicts. This layer is also responsible for maintaining the network capacity to reasonable level .Collision detection, avoidance is done at this layer. So that no conflict occurs in communication between various node of network[2].

CHAPTER: 3

LITERATURE REVIEW

3.1 INTRODUCTION:

In the previous chapters we discussed briefly about the basics and classification of Topology control in Wireless sensor network. Among that we realized that power consumption of a node is the most important factor to be noticed. So we have made a detailed literature review about the different Topology control protocol in order to minimize energy consumption that already exists.

As we discussed earlier that the topology control mechanism are applied to increase the network capacity and decrease the energy consumption. There are three scheme are there to control the topology

- a. Location based Topology control
 - iii. Range assignment and variant
 - iv. Energy efficient communication
- b. Direction based topology control
- c. Location free topology control

3.2 Location based Topology control:

- o **LMST protocol (Local minimum spanning tree):**

LMST protocol [2] is one of the protocols based on the location based topology control approach. In this protocol symmetric wireless medium is consider. The node have same maximum transmit power. LMST protocol first involves Information Exchange in which each node makes a data structure it may be a table that composed of both Node id and location transmit this beacon message to all neighbours at maximum transmit power. Then it constructs topology by creating local minimum spanning tree for each node. Which can be done when the beacon message is received by the neighbours within the corresponding range each node try to construct its local minimum spanning tree by the help of prims algorithm. The link weight is same as the Euclidian distance between two nodes. From this distance the power can be calculated by using the following formula:

$$P_{uv} = (D(u, v))^{\beta} * c$$

Where C =path loss component
 β =Distance power gradient and $\beta \geq 1$

After the formation minimum spanning tree then define the set of neighbours in the final topology depending upon the distance that is at one-hop distance from source. Then it determine the transmit power of each node by comparing the received energy of the beacon message and the maximum transmit power of node that is received the message. Every node can estimate minimum power level needed to reach the destination node by comparing with the maximum transmit power with the receiving power of beacon message.

Broadcast power is also compute by nodes, this power required to reach to the farthest node in the network.

The topology produced by the LMST protocol can be preserves in worst case.

3.3 Direction based topology control:

- **CBTC protocol (Cone-based topology control):**

In cone-based topology control [2] the transmit power of every node is set to some minimum power .Power is function of width ω so that when this minimum power is given to the respective node let say u and minimum power given to the node u be $P_{u, \omega}$ such that node u can reach at least one node in every cone of width ω centred at the respective node. A node must retain connection to at least one neighbour in every direction where determine ω direction. In this protocol each node determines the minimum power required to reach the neighbour in every direction then identified the energy inefficient edge and remove it from final topology.

Every node can communicate with other node within its range by transmitting beacon message to these node which contain the node Id and power used to send the message and the receiving node also send acknowledgement message in response to beacon message. The ack message contains the Id of sender, receiver and power used to transmit the message.

3.4 Location Free Topology control:

- **XTC protocol (eXtreme topology control):**

In XTC protocol [2] every node in the network maintains an order relation with its neighbour set. The ordering relation can be explaining in terms of strength of received signal or by packet delivery ratio. Here the link quality is measured in terms of received

CHAPTER:3

signal strength. Neighbour order can be found out by sending a beacon message at maximum power. Then the receiver node measures the received signal strength and order accordingly. This process repeated for some time to find out the proper order then form neighbour list. Then broadcast the neighbour list with maximum power. Then network topology is constructed at each node locally. The XTC protocol computes the topology for bidirectional links. It also preserves connectivity at worse case.

CHAPTER: 4

ALGORITHM AND IMPLEMENTATION

4.1 Algorithm:

The work is an implementation of a proposed protocol present in paper "Topology control of Multi-Hop wireless Networks using transmit power adjustment" by Ram Ramanathan and Regina Rosales-Hain[4].

Algorithm CONNECTIONCHECK

INPUT:

N=number of Nodes in a wireless sensor network G be the MAXPOWER graph.

L (X_x, Y_x) =Location of each node x in the WSN G.

p_{min}= minimum power required to communicate through a distance d, it is a function of distance.

C=number of possible nodes pairs

NC=number of cluster

R=sorted pair list

OUTPUT: Transmit power level of each node P to form a connected topology

{

begin

1. Initialization:
 - 1.1 $d(x,y)=0$
 - 1.2 $p_{min}=a*d(x,y) // 0 \leq a < 1$
 - 1.3 $N=0$
 - 1.4 Create Cluster per node depending upon N
 - 1.5 $C=0$
 - 1.6 $NC=0$
2. Enter the Number of Nodes N
3. Calculate the Euclidian distance $d(x, y)$.
4. Arrange the (x, y) on the basis of $d(x,y)$ in ascending order and store in R and return C
5. $NC=N$
6. For $i=1$ to C
7. Selectnodepair(C)
8. If cluster of both node pair are different then
9. Assign P(x) and P(y) to the $d(x,y)$
10. Merge Both node pair cluster to form new cluster
11. $NC=NC-1$
12. If NC is equal to 1
 then stop
13. Minimum_power(G,p_{min},P,k,R)

End

}

Procedure minimum_ power (G, p_{\min} , P, k, R)

```
{  
  1. For i=N to 1  
  2. Select(node)  
  3. Create a set S of node pairs in which the selected node is the source or destination  
     node.  
  4. Arrange the set S in descending order of  $d(x,y)$   
  5. Calculate  $p_{\min}$  for each node and compare with the power level of each node  
  6. If  $p_{\min}(d) > P(u)$  then Remove that node pair from T  
  7. Search node pairs in T and check if  $P(u) = p_{\min}(d)$  then the graph is not K-  
     connected stop  
  8.     Else assign  $P(u)$  to  $p_{\min}(d)$   
}
```

We have reproduced here the proposed protocol for the sake of completeness. The detailed protocol found in a paper [Topology Control of multi-hop wireless networks using transmit power adjustment by Ram Ramanathan and Regina Rosales –Hain][4].

4.2 Parameter description:

1. G represent the multi-hop-wireless network. Which is represented as $G(N, L)$.
2. N =number of nodes
3. L =location of each node
4. P is the transmit power associated with each node.
5. p_{\min} is least power function is the minimum power needed for transmission between nodes.
6. K is the connectivity parameter e.g. $k=1$ for one-connectivity[4].

4.3 Algorithm analysis :

I have implemented a polynomial time algorithm CONNECTIONCHECK [4] for a connected STATIC network. I referring this algorithm from paper proposed by Ram Ramanathan, Regina Rosales-Hain CONNECT[4].The multi-hop wireless network contain several nodes. A packet must be successfully sent to destination through several nodes. The communications possible if there is a link exist between source nodes to destination whether direct or indirect through several intermediate nodes. Here actually the multi-hop wireless network is represented as a graph. Ever vertices are represented as nodes and communication links as edges. So the two nodes are communicated as if there exist an edge between corresponding vertices.

Multi-hop wireless network is represented as $G=(N, L)$ [4] where N represents the number of nodes and L represent their location with respect to the node. This algorithm is a simple greedy based algorithm. The greedy method suggests that one can devise an algorithm that works in stages, considering one input at one time. At each stage, a decision is made regarding whether the solution is an optimal solution or not. Every greedy approach has some constraint function and objective function. Any subsets that satisfy the constraint are called feasible solution. We have to find the feasible solution that maximizes or minimizes the objective function. Here this algorithm is a minimization problem. Here the main objective of the algorithm is to minimize the maximum transmit power of each node rather than the overall nodes. Here the constraint are simply the network connectivity between node and the transmission power of nodes must be less that the maximum possible transmit power. While The CONNECTIONCHECK [4] algorithm can found out the transmit power of each and every node but it may not be per-node minimal due presence of some side-effect edges and this node may have some negative effect on the transmit power of every node. It may involve lowering of power level or elimination some edges. So another procedure that is applied to have per node minimum transmit power that is minimum power [4].It uses the

presence of side effect edges and found out the per node minimal power. This procedure simply decrease the transmit power of node to a certain level so that the induced graph can't be disconnected.

4.4 Implementation:

I have implemented the above algorithm using C#.Net programming language. First I create each node that is present in the (node.cs) file and specify the attribute of each node that is the node location in term of x-coordinate and y-coordinate, Node id, power associated with each node, receiver sensitivity and the Euclidian distance from node considered to the all other node. Each and every node has some region of communication that is known as node boundary. we here assign node boundary to each and every node. Location of each and every node are randomly assigned and the node location are checked with the boundary condition whether the node present inside the boundary or not. If it is present inside the boundary then considered otherwise discarded. Another node attribute is the node id of the destination node to which the current node can communicate. We first made cluster for each and every node by specifying the node boundary .In which the node can able to communicate.The cluster can be created by the help of generic collection class present in the System.Collections.Generic namespace.

Syntax:

1. List<node> li=new List<node> ()
2. For n is greater than 0
3. li.Add(new node())

Here List is a collection which can contain object of type node. All the node property including the node id, power, boundry condition etc is encapsulate in the respective list object. List object are nothing but nodes. And every List object can be access by the help of indexer e.g. li[i] where i represent node no.

After that from each location the Euclidian distance can be found out. And from this distance we can found out the power associated with each node by applying the following formula:

$$P_{uv} = (D(u, v))^{\beta} * c$$

Where

C=path loss component

β =Distance power gradient


Here we consider the free space propagation model so for this model the value of β be 2 and $c=1$

So the generalized formula is:

$$P_{uv} = (D(u, v))^2$$

Initially all the calculated power assign to each node and all nodes transmit with this maximum power. Then by applying the above algorithm we can calculate the per node minimal transmit power. Here I take $k=1$ that is for one – connectivity only. Here one thing I took p_{\min} as constant multiple of x let say a and the value of $0 \leq a < 1$. With p_{\min} we check the connectivity issue in the minimum power procedure. Here I write the program for 20 nodes. Then the average transmits power of the entire node for a particular number of nodes calculated. And a graph is plotted between the density and the average transmits power of node.

4.5 Simulation result:

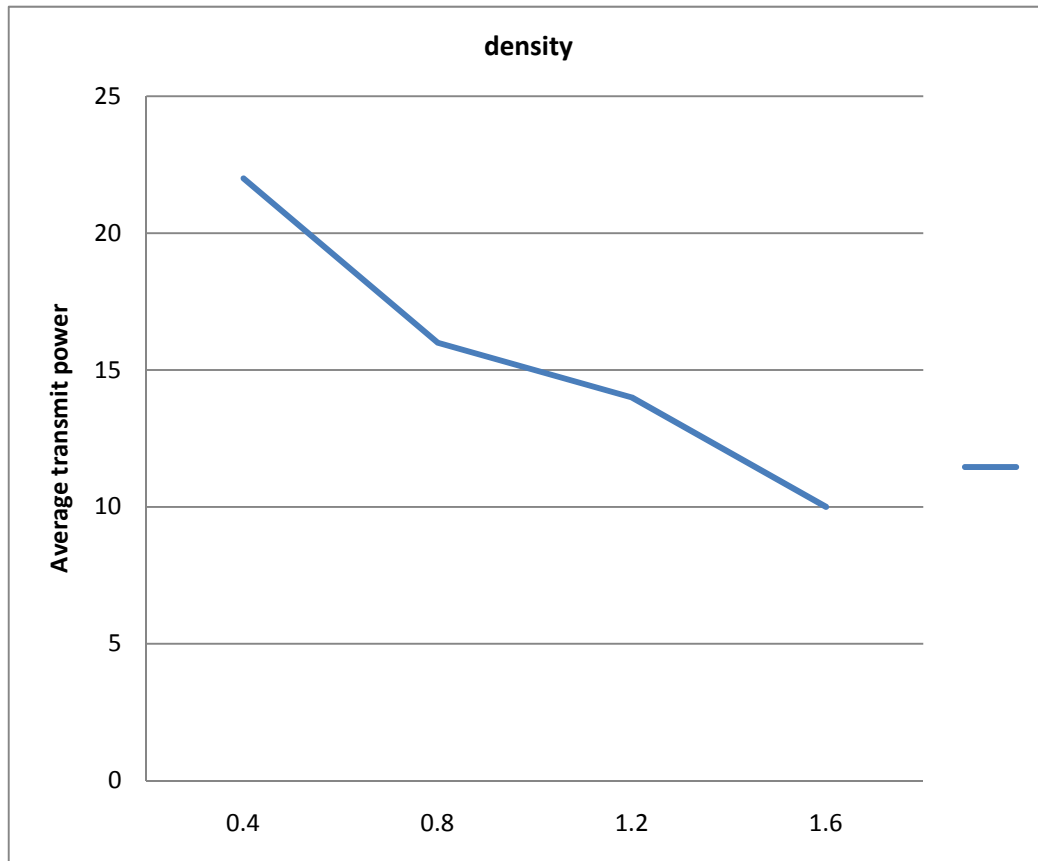

4.6 Result analysis:

Here we plot a graph between density and average energy of node in a wireless sensor network. From this result we found that with increase in density the average power decreases because suppose a area of radii 2 contain two nodes then the Euclidian distance between node are larger as comparison to ten nodes in the same area because their mutual distance decreases . As the power is calculated directly from distance and with increase in distance the power increases and vice-versa. Here the density plotted on x- axis and average power on y-axis.

Conclusion:

We have studied wireless sensor network, its features and challenges. We also studied the different types of topology control techniques and its properties. We studied and analyzed algorithm that is proposed in the paper by Ram Ramanathan and Regina Rosales - Hain and implement it show the simulation result.

References:

- [1] Carlos de Morais Cordeiro, Dharma Prakash Agrawal ,Ad-hoc and sensor networks theory and application,World Scientific publication,2006
- [2] Paolo Santi, Topology control in wireless Ad-hoc and Sensor networks, Jhon Wiley and son's publication, 2005.
- [3]prasant mohapatra, srikanth Krishnamurthy, ad-hoc networks technologies and protocols, Springer Science + Business Media, 2005
- [4]Ram Ramanathan, Regina Rosales-Hain, Topology Control of Multihop Wireless Networks using Transmit Power Adjustment, Internetwork research department, BBN Technologies Cambridge, Massachusetts, (IEEE Infocom 2000) 2000; 404-413.
- [5] Jang –Ping Sheu, Shin – Chih Tu, Chi- Hung Hsu, and Location-free topology control protocol in wireless ad hoc networks, Computer Communication 31(2008) 3410-3419.
- [6] Prasan kumar sahu, jang- ping Sheu, Kun-Ying Hsieh, Power control based topology construction for the distributed wireless sensor networks, Computer Communication 30(2007)2774-2785.